


INDUSTRIAL MATTING

NR SBR NBR A 608 RW2



General:

NR-SBR-NBR, grey, commercial
Sulphur crosslinked

Matting with fine-rippled surface
(one side fine-rippled dessin/one side cloth
impression Height of fine-rippled dessin ~ 1,3 mm

Wrapping: stretched foil, labelled

*SVHC-free

Properties:

Hardness [Shore A]:	ISO 48,4	70±5
Density [g/cm ³]:	ISO 1183-1	~1,60
Tensile Strength [N/mm ²]:	ISO 37 type 2	5
Elongation at Break [%]:	ISO 37 type 2	300

correspond to WDK-guideline 2201 : 2020-10 "Quality characteristics of Elastomer sheets- and plates"

Working temperature range

Medium	dyn.(stat.)	max.	short-term
Air	(-20°C)	+70°C	+90°C



Compression set DIN ISO 815

Duration	Temperature	CS
22h	+70°C	40%

Stabilities:

Ozone resistance:	non resistant
Weather resistance:	non resistant
Oil resistance:	moderate resistant
Fuel resistance:	non resistant
Acid resistance:	moderately resistant
Strong bases:	resistant
Abrasion resistance:	moderate suitable

ROTACURED SHEETS product number	Thickness mm	Width mm	Length mm
402199130	3,0	1.400	10.000
402132330	3,0	1.250	10.000
402132300	3,0	1.000	10.000

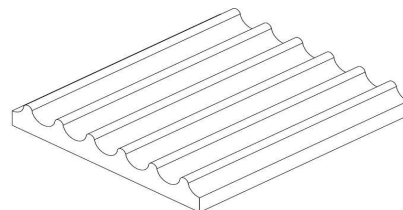

PAH disclaimer:

Referring to an [international proficiency test](#) and information received from the testing laboratories about accuracy of test results we may inform you, that test results for the same specimen from different laboratories may not correlate:

* Results of the 10 PAH with individual limits of < 1 mg/kg in the measurement range around the limit are only accurate to approx. ± 70%.

* Results of the overall limit of < 50 mg/kg are only accurate to approx. ± 35%

Our test results are provided on an as-is basis and to the best of our knowledge, without any legally binding commitment. Our tests do not release you from own tests as to the respective application envisaged.

Please note:

This datasheet has been carefully compiled to advise you, our customer, in the best possible way. The information, figures, test values and data correspond to actual engineering standards and are the result of many years of tests and trials. As individual operation conditions influence the application of each product, the information supplied in this datasheet can only be seen as a rough guideline. In every case it is the sole responsibility of the customer to evaluate his individual requirements, in particular whether specified properties of our products are sufficient for the intended use. If there is any doubt (e.g. chemical resistance), do not hesitate to contact our qualified engineers. The use of our products is at the user's own risk. We do not have any influence concerning the application and individual usage. We do of course warrant the quality of our products according to our General Sales Conditions, available on our website or on request.